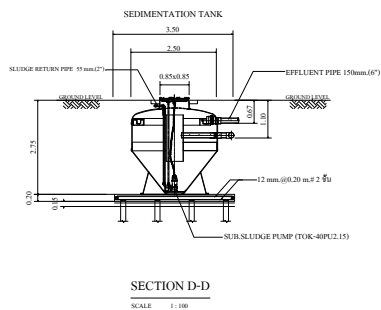
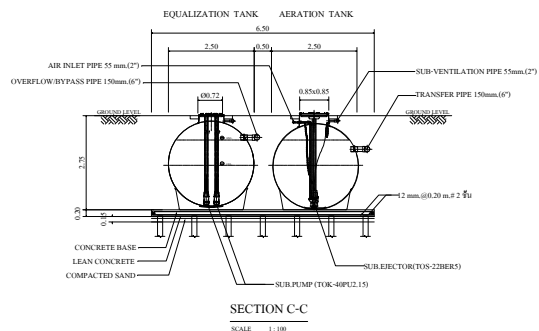
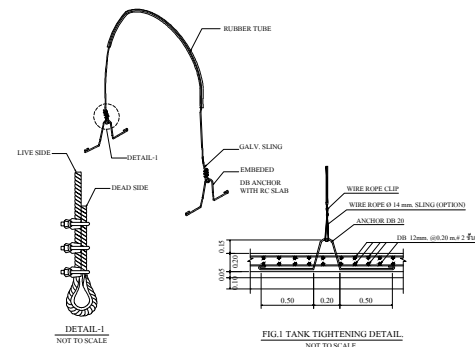
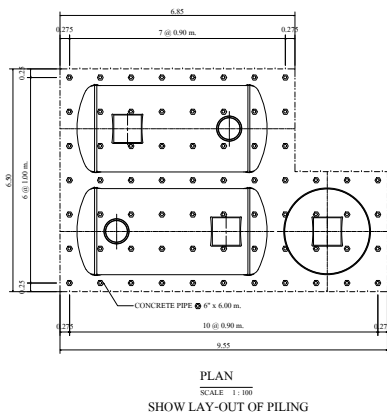


- ผลิตภัณฑ์เสริมใยสังเคราะห์แบบใยเดี่ยว 3.4 และ 3.6 ใยเดี่ยวแบบยาวขนาด
 - ISO 9001:2015
 - ISO 14001:2015
- ผลิตภัณฑ์ใยสังเคราะห์ใยเดี่ยวแบบใยเดี่ยว Autoprey Up and Filament Winding ใยเดี่ยวแบบยาวขนาด
 - ใยเดี่ยว 3.4 และ 3.6 ใยเดี่ยว
 - Glass Roving ใยเดี่ยว
 - Spay-up process ใยเดี่ยว 2,300-2,400 กรัม/หน่วย
 - Filament Winding process ใยเดี่ยว 1,100-1,200 กรัม/หน่วย
 - Chopped Strand Mat ใยเดี่ยวแบบใยเดี่ยว 450 กรัม/หน่วย
 - Woven Roving ใยเดี่ยวแบบใยเดี่ยว 600 กรัม/หน่วย
- ใยสังเคราะห์ Orthophthalic Unsaturated Polyester
 - ASTM D790 Bending Strength $\geq 11.00 \text{ kg./cm}^2$
 - ASTM D638 Tensile Strength $\geq 6.20 \text{ kg./cm}^2$

SPECIFICATION (AME-350)			
NO.	ITEM	CAPACITY OF WATER (CUM.)	BODY MATERIAL
1.	TANK	-	FIBERGLASS, THICKNESS 8 MM
1.1	SEPARATE / EQUALIZATION TANK	23.55	
1.2	AERATION TANK	22.68	
1.3	SEDIMENTATION TANK	7.20	
1.4	TOTAL	53.43	
2.	EQUIPMENT	CONTENT	
2.1	SEWAGE SUMMERSIBLE PUMP (SEPARATE/ EQUALIZATION TANK)	40 A, 0.092 CUM /MIN (TOTAL HEAD 4.0 M.) 0.15 KW. 380 / 3 / 50, 3000 RPM. (2 SET)	
2.2	SUMMERSIBLE EJECTOR (AERATION TANK)	50 A, 2.20-2.60 K.G/GZ. IRL (AT 3000 MMAQ.) 2.20 KW. 380 / 3 / 50, 1500 RPM. (1 SET)	
2.3	SEWAGE SUMMERSIBLE PUMP (SEDIMENTATION TANK)	40 A, 0.092 CUM./MIN (TOTAL HEAD 4.0 M.) 0.15 KW. 380 / 3 / 50, 3000 RPM. (2 SET)	

CONSULTING ENGINEER

PROJECT TITLE

OWNER ADDRESS

SIGNATURE

MODEL AME-350

DRAWING TITLE

INSTALLATION DRAWING
PLAN & SECTION

SCALE	1 : 100	SHEET No./TOTAL
-------	---------	--------------------

DRAWING

ENGINEER

ENGINEER

REFERENCES

DESIGNED _____

APPROVED U PHICHAYA

PRODUCT



OFFICE : 2 Premier Place, Soi Premier 2,
Srinakarin Rd., Nongbon, Prawet, Bangkok 10250, Thailand
Tel : 02301-2100-1 Fax : 0-2301-2141

FACTORY: 454 Moo 9 Kabinburi Industrial Zone,
Km 12 Kabinburi-Korat-Highway Tombon Nonggee
Umper Kabinburi 25110 Thailand
Tel : (037) 204396-406 Fax : (037) 204407

DRAWING HISTORY